

OKOUMÉ RAINURÉ

Okoume throughout - Face veneers II/II
Exterior gluing Class 3 - E1
NF Extérieur CTB-X certified

Decoration and exterior joinery: garage doors, fascia boards, service doors.



TECHNICAL INFORMATION

DEFINITION

Decorative Okoume throughout plywood:

- Selected face veneers and cores.
- Grooved on 1 or 2 sides.
- Various groove profiles available.
- Various groove spacing offered: 71, 86, 109 and 135 mm.
- Standard joining by lap joint or tongue and groove.

GENERAL INFORMATION

Compliance of plywood with European norms:

- Gluing class: according to EN 314-2
- Faces classification: according to EN 635-2
- Dimension tolerance: according to EN 315
- Panel marking: according to EN 636

SPECIFICATIONS


Thicknesses: 10 to 18 mm.

CE NS marking for non-structural use (according to EN 13986).


Density:	500 kg/m ³ (± 50 kg/m ³)
Fire reaction:	D-s2, d0*
Formaldehyde emission:	Class E1 US EPA TSCA Title VI - CARB ULEF
Heat conductivity:	λ = 0,13 W/m.k
Pentachlorophenol content:	< 5 ppm

* Depending on how the panel is installed.

GROOVE PROFILES

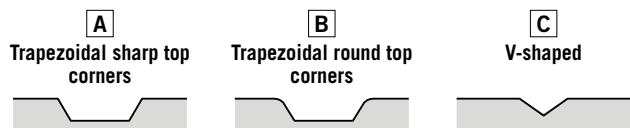

TYPE OF JOINING

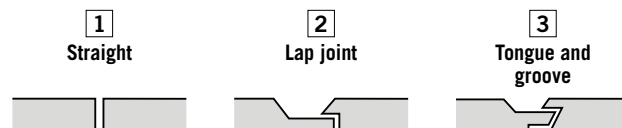

All combinations are possible: **A1** **B1** **C1** ...

Groove spacing: 71 mm and 109 mm | | Non contracting diagrams.

Thickness mm		Sizes cm	
GROOVED ON 1 FACE	GROOVED ON 2 FACES		
10	15	214 x 120,7	
12	18	250 x 120,7	
15		310 x 120,7	
18		310 x 149,1	

For FSC®-certified panels, depending on availability, contact us.